



# DK-6.5

## Professional Speaker System



### SPECIFICATIONS

Type ..... 2-way 2-unit system  
Enclosure ..... Bass-reflex Type  
Drivers  
    Woofer ..... 6.5"  
    Tweeter ..... 1"  
Nominal Impedance ..... 8 Ohms  
Frequency Response ..... 68Hz to 20KHz  
Power Handling ..... 100Watts (Peak)  
                                ..... 60Watts (RMS)

Sensitivity ..... 90dB/W at 1m  
Crossover Frequency ..... 4KHz  
Dimensions ..... 310mm(L)×205mm(W)×190mm(D)  
Net Weight ..... 3.6kg/pce  
Package ..... 430mm(L)×390mm(H)×270mm(W)  
Gross Weight ..... 8.3kg/Pair

Accessories  
    Owner's Manual ..... 1 pce  
    Wall Mounts ..... 2 pcs  
    Flying Nut ..... 4 pcs

### CAUTION


- ◆ Do not install the appliance on or at unstable location.
- ◆ If the loudspeaker is not identified as magnetically shielded, please do not place it near the TV set in order to avoid magnetizing the TV screen.
- ◆ Do not place the loudspeaker in a location where it will be exposed to direct sunlight, high temperature or high humidity.
- ◆ Be sure to turn off your amplifier before connection or disconnecting speakers.
- ◆ Do not operate the speaker with power exceeding limitation, as it may damage the speaker.
- ◆ Do not turn up the volume too much when a graphic equalizer is used to turn up for a higher sound level.
- ◆ Do not turn up for a higher sound level with a lower power amplifier, or it may damage tweeter speakers.
- ◆ Keep the volume control of your amplifier at the low position when first turn it on to avoid damaging.
- ◆ Use a clean dry cloth to wipe off dirt.
- ◆ Do not use volatile solvents such as alcohol, paint thinner, gasoline or benzene, etc to clean the cabinet.

# BFA

ENTERTAINMENT



**INSTALLING**

# Owner's Manual

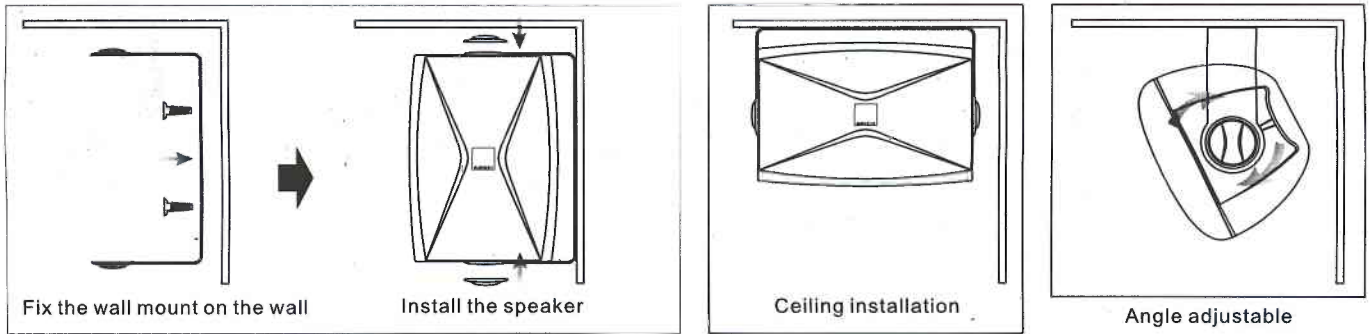

## CAUTION

- ◆ Before installation, check the ceiling or wall to confirm that it is strong enough to stand with the weight of the speaker system.
- ◆ **BFAudioPro** can not assume the responsibility against accidents caused by the drop of speaker system due to insufficient mounting strength or to any defect in installation.
- ◆ If the material or thickness of a ceiling or wall can not be confirmed, consult a professional specialized in installation.

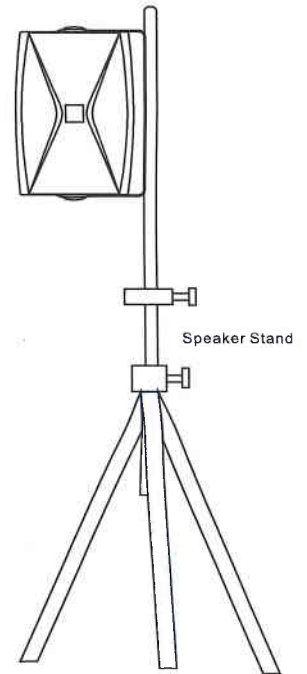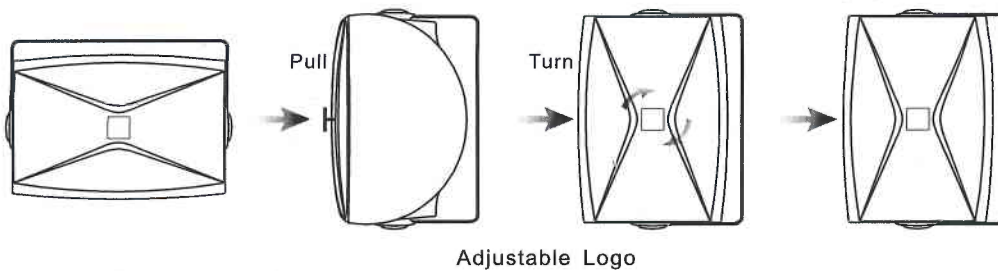

## CONNECTIONS

1. Before connecting your loudspeaker with amplifier, make sure the amplifier and every associated equipment is turned off.
2. Note that whether the impedance of the loudspeaker matches with that of the amplifier.
3. Align the (+) and (-) polarities for the left (L), right (R) and connect the speaker terminals on the amplifier.
4. If the polarities of left and right are not aligned properly, the quality of the reproduced sound, the ambience and the feeling of direction will be markedly impaired.

